





CWV2 1600 SPECIFICATIONS

Model Number	CWV2-1600-0030	CWV2-1600-0035	CWV2-1600-0040
Capacity Range (pF)	100-1600	100-1600	100-1600
Voltage (kV) Peak			
Test	30	35	40
Working	18	21	24
Current Amps (RMS) Max.	750†	770†	790†
Type	Ceramic	Ceramic	Ceramic
Nominal Dimensions			
Length (in. / mm)	25.00 / 635.00	25.00 / 635.00	25.00 / 635.00
Diameter (in. / mm)	8.56 / 217.42	8.56 / 217.42	8.56 / 217.42
Torque (in Lbs.) Max.	24	24	24
Direct Pull (Lbs.) Max.	N/A	N/A	N/A
Weight (Nominal)	30 lb.	30 lb.	30 lb.
NOTES:			
<i>Mounting:</i> Both ends have tapped holes.			
† Water cooling.			

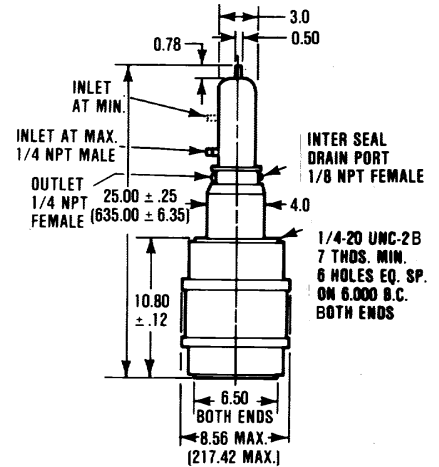

CAPACITY vs TURNS
Typical Data

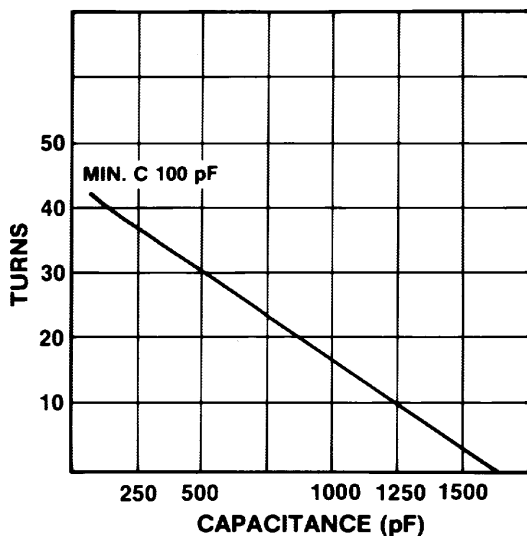

CONTINUOUS RMS AMPERES vs FREQUENCY
(at 24kV PEAK WORKING VOLTAGE)

